


Size (inches) Nominal W x H x D	Size (inches) Actual W x H x D	Koch Part Number	Capacity (CFM)	Initial Resistance (inches W.G.)	Media Area (Sq. Ft.)
10 x 20 x 1	9 1/2 x 19 1/2 x 3/4	102-701-001	425	0.21	2.9
12 x 20 x 1	11 1/2 x 19 1/2 x 3/4	102-031-002	500	0.21	3.5
12 x 24 x 1	11 3/8 x 23 3/8 x 3/4	102-701-002	600	0.21	4.2
14 x 20 x 1	13 1/2 x 19 1/2 x 3/4	102-701-003	590	0.21	4.1
14 x 25 x 1	13 1/2 x 24 1/2 x 3/4	102-701-004	730	0.21	5.1
15 x 20 x 1	14 1/2 x 19 1/2 x 3/4	102-701-005	625	0.21	4.4
16 x 20 x 1	15 1/2 x 19 1/2 x 3/4	102-701-006	670	0.21	4.7
16 x 25 x 1	15 1/2 x 24 1/2 x 3/4	102-701-007	840	0.21	5.9
18 x 24 x 1	17 3/8 x 23 3/8 x 3/4	102-031-016	900	0.21	6.3
18 x 25 x 1	17 1/2 x 24 1/2 x 3/4	102-031-011	940	0.21	6.6
20 x 20 x 1	19 1/2 x 19 1/2 x 3/4	102-701-008	840	0.21	5.9
20 x 25 x 1	19 1/2 x 24 1/2 x 3/4	102-701-009	1050	0.21	7.4
24 x 24 x 1	23 3/8 x 23 3/8 x 3/4	102-701-010	1200	0.21	8.5
25 x 25 x 1	24 1/2 x 24 1/2 x 3/4	102-031-014	1310	0.21	9.3

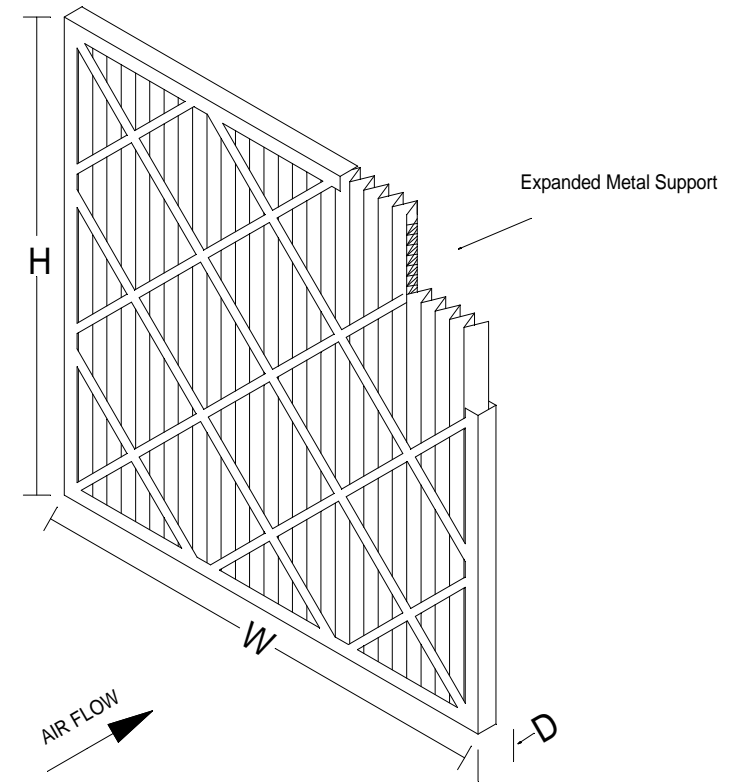

Standard Construction:

1. New White 100% Synthetic Media
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame

Specifications:

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2007)
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 300 FPM
4. UL Rating - Class 2 per UL Standard 900
5. Maximum Operating Temperature: 200 degrees Fahrenheit and 93 Celsius
6. Tolerance: Height & Width - +/- 1/8"
7. Tolerance: Depth - +/- 1/16"



Koch Filter Corporation
 Filtration Products Crafted with Pride
 P.O. Box 3186 - Louisville KY 40201
 625 W. Hill Street - Louisville KY 40208
 Phone: (502) 634-4796 FAX: (502) 637-2280

Multi-Pleat XL8
1" High Capacity

Drawn By: **Brent Chamberlain**

Date: **January 14, 2011**

Revision

B