


Duo-Cap

Medium Efficiency Extended Surface Cartridge Filter

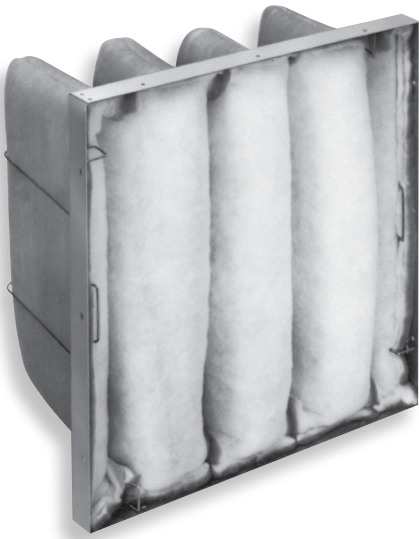

Features

- **MERV 8 performance rating (ASHRAE Test Standard 52.2-2012)**
- **Superior dust holding capacity**
- **Extended filter lifecycles**
- **Low initial pressure drop**

Koch **Duo-Cap Cartridge Filters** are constructed with a progressively dense synthetic media. (Also available with microfiberglass upon request). This graded density construction ensures low resistance to air flow, high dust holding capacity, and prolonged filter lifecycles.

Duo-Cap is designed to fit Cambridge Filter Corporation Hi-Cap and Side-Cap* frame systems without modification to existing framework.

Duo-Cap Technical data

Model #	Nominal Size	Capacity (CFM)	Initial Pressure Drop	Media Area
KDC 750	12x24x9	750	0.15	6
KDC 800	16x20x9	800	0.15	7.5
KDC 1050	16x25x9	1050	0.15	7.5
KDC 1000	20x20x9	1000	0.15	9
KDC 1200	20x24x9	1200	0.15	9
KDC 1225	20x25x9	1200	0.15	9
KDC 1500	24x24x9	1500	0.15	12
KDC 1250	12x24x15	1250	0.25	10
KDC 1400	16x20x15	1400	0.25	11
KDC 1800	16x25x15	1800	0.25	12.5
KDC 1750	20x20x15	1750	0.25	12.5
KDC 2000	20x24x15	2000	0.25	15
KDC 2050	20x25x15	2000	0.25	15
KDC 2500	24x24x15	2500	0.25	20

* Competitive brand and trade names are for product identification purposes only.



8401 Air Commerce Drive, Louisville, KY 40219
toll free: 800.757.5624 | phone: 502.634.4796 | Fax: 502.969.2364
info@kochfilter.com | www.kochfilter.com

Duo-Cap0 | Bulletin K-240