

FRAME:

- 2" DEEP FRAME - ALUMINIZED STEEL
- 4" DEEP FRAME - ALUMINIZED STEEL

EFFICIENCY:

- 65% ASHRAE
- 85% ASHRAE
- 95% ASHRAE

OPTIONAL GASKET MATERIAL:


- HT ROPE - 1/4 INCH
- OTHER: _____

GASKET LOCATION:

- DOWNSTREAM
- UPSTREAM
- UPSTREAM AND DOWNSTREAM
- OTHER: _____

NOTES:

STANDARD DEPTHS: 1-3/4" AND 3-3/4"
 ALUMINIZED FACEGUARDS ON BOTH SIDE OF FILTER
 CLASS 1 PER UL STANDARD 900
 MAX. OPERATING TEMP: 750 F

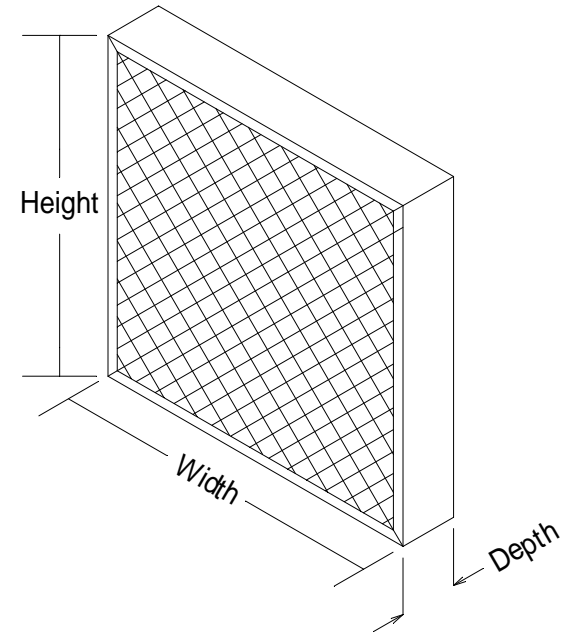

All Dimensions are Actual Size

Customer Notes / Additional Requirements



Koch Filter Corporation
 Filtration Products Crafted with Pride
 P.O. Box 3186 - Louisville KY 40201
 625 W. Hill Street - Louisville KY 40208
 Phone: (502) 634-4796 FAX: (502) 637-2280

**MULTI-CELL CS
 FILTER SUBMITTAL**