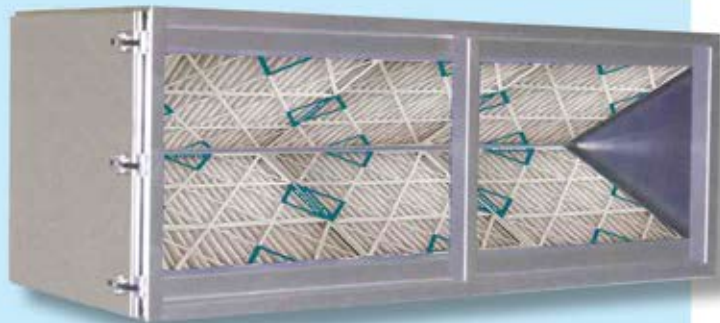

V-Stage Housing



V-Stage Housings are constructed of 16 gauge galvanized steel. Units are also available in stainless steel, aluminized steel and epoxy coating.

All V-Stage Housing units are supplied standard with two access doors, hinged at the rear of the housing for easy access to the filters. Each door is gasketed around the perimeter and at the ends of the tracks. Quick action, positive lock over center draw latches are used to seal the doors. V-Stage housings are equipped with an outer flange for easy connection to ductwork.

V-Stage housings are constructed as a one piece assembly for side service installations. Units are shipped fully assembled from the factory, ready for installation with a minimum amount of time on the job site.