

# OdorKleen™ 200/M13

## High Efficiency MERV 13 Carbon/Alumina Pleated Filter



### FEATURES

Superior odor removal

Low pressure drop

Virtually no dusting

Great particulate efficiency

MERV 13 efficiency

Designed to remove ammonia, formaldehyde, sulfur dioxide and hydrogen sulfide

### OdorKleen 200/M13

OdorKleen 200/M13 offers superior performance in gaseous and odor adsorption, as well as excellent particulate filtration. This "combination" product contains 200 gsm of granular activated carbon and a MERV 13 filtration layer.

The OdorKleen 200/M13 media is an efficient, carbon filled media that provides low resistance to airflow and a high capture rate of gaseous odors. Its high activity carbon has nearly five million square feet of surface area per pound. The result is high-efficiency filtration for a variety of challenges. Unlike many competitors' products, the "flexible carbon filled media" bonds between the fibers in the OdorKleen 200/M13 and only uses approximately 1% of the carbon's surface area. This maximizes the exposure of the gas contaminant to the carbon.

The efficiency layer used to capture particulate contaminants is made up of a polyester blend. The combination of the two distinct medias give the filter an efficiency rating of MERV 13, while maintaining a low pressure drop unlike competitors' products.


The OdorKleen 200/M13 can be used in several types of applications:

- Chemical Storage
- Commercial Office Buildings
- Laboratories
- Sports Arenas
- Museums and Archives
- Smoking Lounges
- Pharmaceutical
- Casinos
- Hospitals
- Laminate Adhesives
- Airports
- IAQ Emergency
- Industrial Facilities


## OdorKleen™ 200/M13 Performance Data

Filter Depth	Air Velocity	Initial Resistance (inches w.g.)	Final Resistance (inches w.g.)	Pleats Per Linear Foot
1"	300 FPM	0.34	1.2	15
2"	500 FPM	0.53	1.2	14
4"	500 FPM	0.48	1.2	9

### Initial Resistance vs. Air Flow Rate

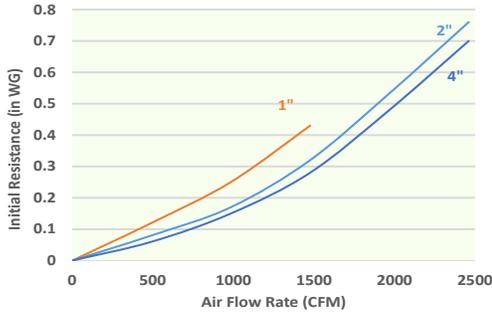

### Efficiency by Particle Size

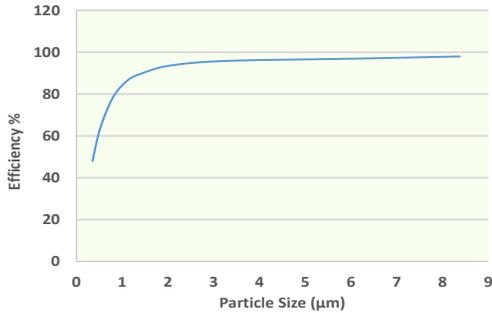

## OdorKleen™ 200/M13 Specifications

Filter Depth	1", 2", 4"
Efficiency	MERV 13
Media	100% Synthetic Carbon Impregnated Media
Media Support	Self-Supporting
Frame Type	Beverage Board
Max Operating Temperature	180°F (93°C)
Recommended Final Resistance	1.2" w.g.
Filter Certification	UL 900

## Engineering Specifications

### 1.0 General Specifications

- 1.1 Filters shall be OdorKleen 200/M13 extended surface pleated air filters as manufactured by Koch Filter.
- 1.2 Filters shall be available in nominal depths of 1", 2", and 4".
- 1.3 Filters are classified by Underwriters Laboratories to UL 900.

### 2.0 Filter Material and Construction

- 2.1 Media shall be 100% synthetic carbon impregnated mechanical media.
- 2.2 Filter media is self-supporting.
- 2.3 Filter frame shall be comprised of a high wet strength beverage board with a cross member designed to increase filter strength and rigidity. Frame shall be recyclable.

### 3.0 Filter Performance

- 3.1 Filters shall be MERV 13 when tested in accordance with ASHRAE 52.2 Test Standard.
- 3.2 For initial resistance of filters, see Performance Data chart above.
- 3.3 Filters shall be rated to withstand a continuous operating temperature up to 180°F.
- 3.4 Filters shall have a recommended final resistance of 1.2" w.g.

Part Number	Nominal Size*	Capacity (CFM)	
	WxHxD	300 FPM	500 FPM
102-793-12121	12x12x1	300	500
102-793-12241	12x24x1	600	1000
102-793-16201	16x20x1	675	1125
102-793-16251	16x25x1	850	1400
102-793-18241	18x24x1	900	1500
102-793-20201	20x20x1	850	1400
102-793-20241	20x24x1	1000	1675
102-793-20251	20x25x1	1000	1750
102-793-24241	24x24x1	1200	2000
Part Number	WxHxD	500 FPM	625 FPM
102-793-12122	12x12x2	500	625
102-793-012	12x24x2	1000	1250
102-793-016	16x20x2	1125	1400
102-793-017	16x25x2	1400	1750
102-793-018	18x24x2	1500	1875
102-793-019	20x20x2	1400	1750
102-793-020	20x24x2	1675	2100
102-793-021	20x25x2	1750	2175
102-793-022	24x24x2	2000	2500
Part Number	WxHxD	500 FPM	625 FPM
102-793-023	12x24x4	1000	1250
102-793-025	16x20x4	1125	1400
102-793-026	16x25x4	1400	1750
102-793-027	18x24x4	1500	1875
102-793-028	20x20x4	1400	1750
102-793-029	20x24x4	1675	2100
102-793-030	20x25x4	1750	2175
102-793-031	24x24x4	2000	2500

8401 Air Commerce Drive, Louisville KY 40219 | toll free: 800.757.5624 | phone: 502.634.4796 | Fax: 502.969.2364

[info@kochfilter.com](mailto:info@kochfilter.com) | [www.kochfilter.com](http://www.kochfilter.com)